

QUARK XPRESS 4 & 5 SETTINGS FOR HANNANPRINT VICTORIA

THESE STEPS ARE FOR CREATING POSTSCRIPTS USING THE PRINERGY PPD AND SHOULD BE SAVED AS A 'PRINT STYLE' IN EDIT FOR FURTHER USE.



STEP 1: GO TO CHOOSER & CHOOSE LASERWRITER 8

STEP 2: CHOOSE PRINT IN QUARK & SET UP AS BELOW

DOCUMENT TAB

Print

Print Style: **Prinergy** ▼

Copies: **1** Pages: **All** ▼ **Range Separators...**

Document Setup Output Options Preview

Separations Spreads Collate
 Include Blank Pages Thumbnails Back to Front

Page Sequence: **All** ▼ Bleed: **5 mm**
Registration: **Centred** ▼ Offset: **10 pt**
Tiling: **Off** ▼ Overlap: Absolute Overlap

Page Setup... **Printer...** **Capture Settings** **Cancel** **Print**

SETUP TAB - SET YOUR PAPER WIDTH TO TRIM SIZE + 30MM

Print

Print Style: **Prinergy** ▼

Copies: **1** Pages: **All** ▼ **Range Separators...**

Document **Setup** Output Options Preview

Printer Description: **Prinergy Refiner** ▼

Paper Size: **Custom** ▼

Paper Width: **240 mm** Paper Offset: **0 mm**
Paper Height: **Automatic** ▼ Page Gap: **0 mm**
Reduce or Enlarge: **100%** Fit in Print Area
Page Positioning: **Centre Horizontal** ▼ Orientation:

Page Setup... **Printer...** **Capture Settings** **Cancel** **Print**

QUARK XPRESS 4 & 5 SETTINGS FOR HANNANPRINT VICTORIA



OUTPUT TAB

Print

Print Style: **Prinergy** ▼

Copies: **1** Pages: **All** ▼ **Range Separators...**

Document Setup **Output** Options Preview

Print Colours: **Composite CMYK** ▼ Resolution: **2400** ▼ (dpi)
Halftoning: **Conventional** ▼ Frequency: **100** ▼ (lpi)

Print	Plate	Halftone	Frequency	Angle	Function
✓	Process Cyan	-	100	105°	Default
✓	Process Magenta	-	100	75°	Default
✓	Process Yellow	-	100	0°	Default
✓	Process Black	-	100	45°	Default

Page Setup... **Printer...** **Capture Settings** **Cancel** **Print**

OPTIONS TAB

Print

Print Style: **Prinergy** ▼

Copies: **1** Pages: **All** ▼ **Range Separators...**

Document Setup Output **Options** Preview

Quark PostScript Error Handler

Page Flip: **None** ▼ **Negative Print**

Pictures

Output: **Normal** ▼

Data: **Binary** ▼ **Overprint EPS Black**


OPI: **Include Images** ▼ **Full Resolution TIFF Output**

Page Setup... **Printer...** **Capture Settings** **Cancel** **Print**


QUARK XPRESS 4 & 5 SETTINGS FOR HANNANPRINT VICTORIA



PREVIEW TAB - CLICK PRINTER AT THE BOTTOM

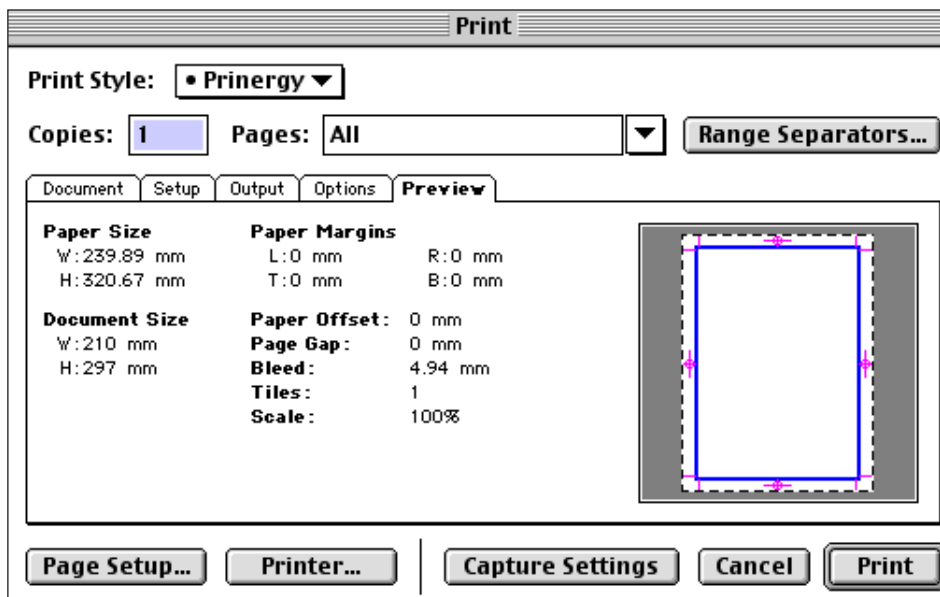


SET THE DESTINATION TO FILE

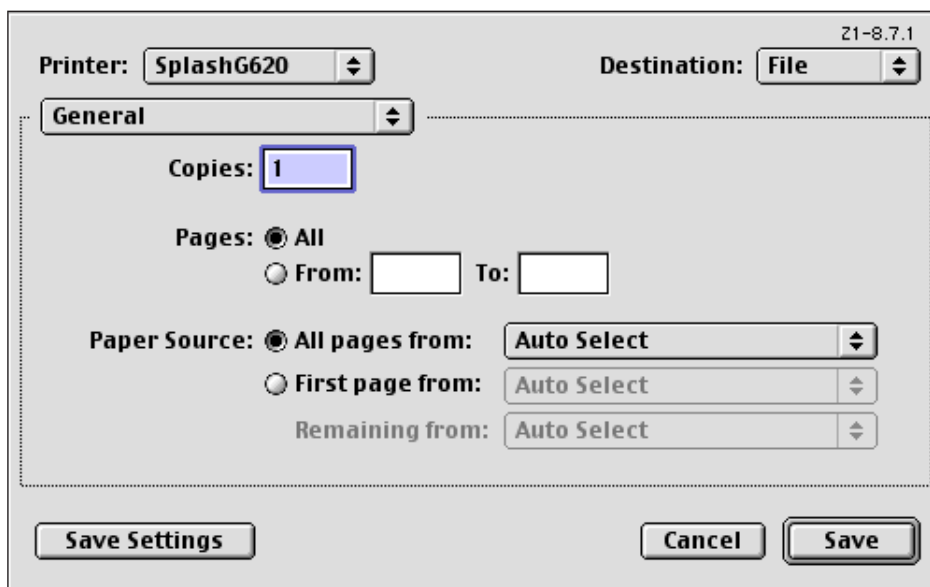


QUARK XPRESS 4 & 5 SETTINGS FOR HANNANPRINT VICTORIA



CLICK GENERAL AND CHANGE TO SAVE AS FILE

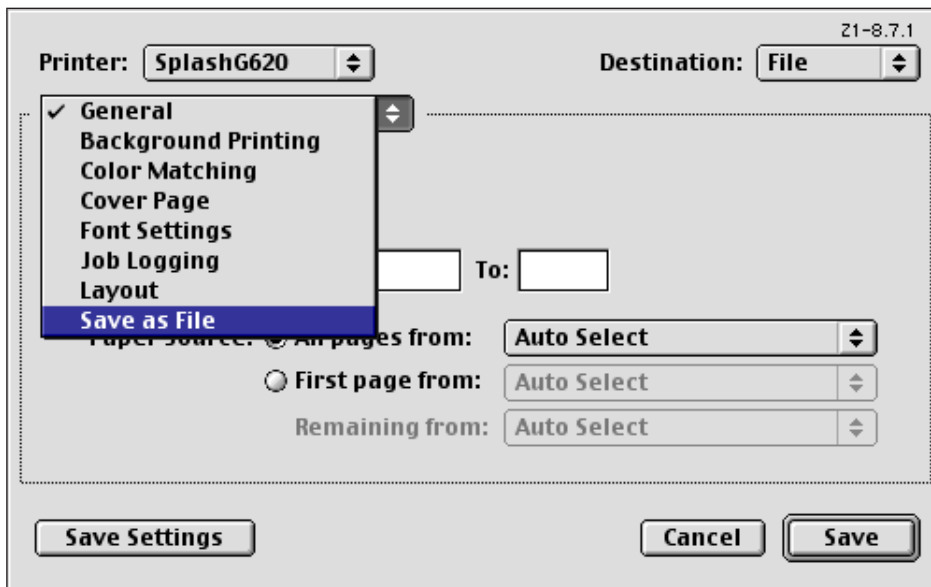


CLICK THE SETTINGS AS BELOW AND CLICK SAVE

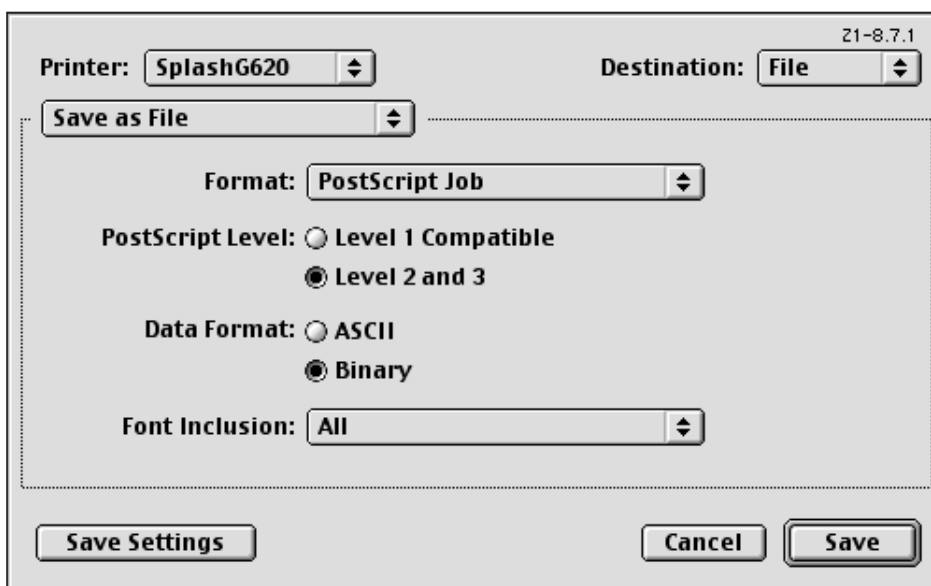


QUARK XPRESS 4 & 5 SETTINGS FOR HANNANPRINT VICTORIA



CHOOSE A LOCATION & NAME FOR YOUR POSTSCRIPT FILE

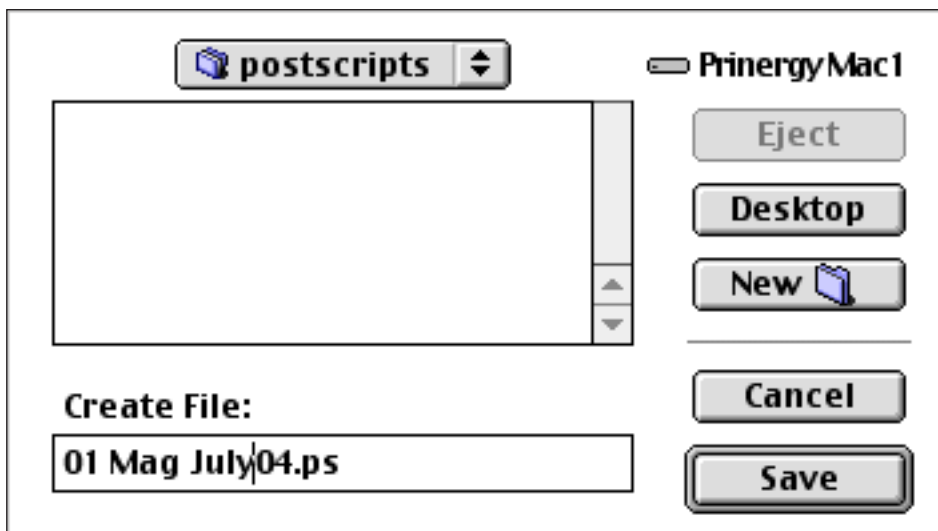

NOW YOU JUST CLICK PRINT

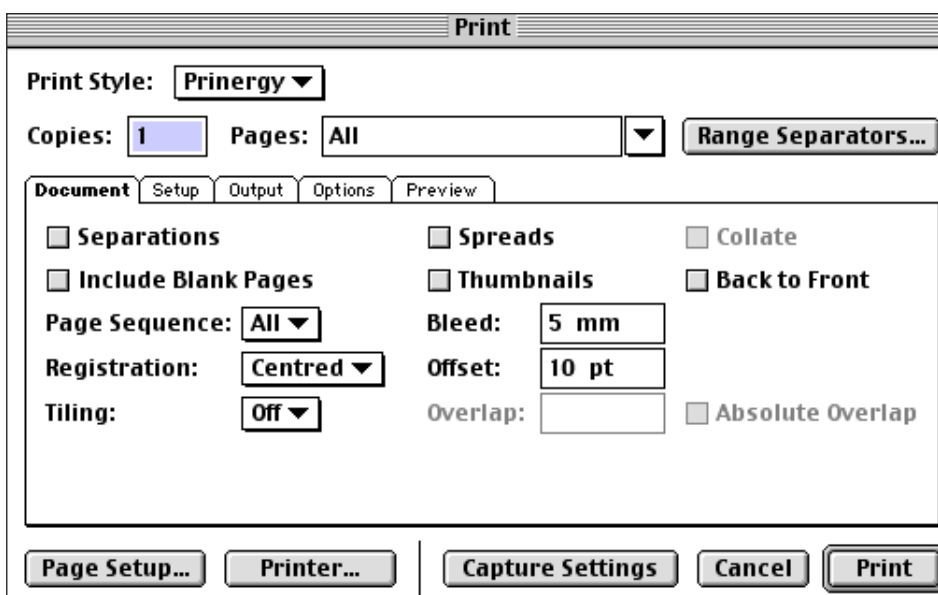

POSTSCRIPT GUIDELINES FOR CTP



*NO TRAPS SHOULD BE APPLIED - IF NEEDED, SPECIFY TO HPV

*5MM BLEED SHOULD BE ALLOWED FOR ON THE QUARK PAGES

*FILES SHOULD HAVE LOGICAL NAMES USING PAGE NUMBERS.
NO SPACES OR SYMBOLS SHOULD BE USED. KEEP TO THE FORMAT
OF EG P01 MAGNAME MAY04.PS

*SUPPLY FILES AS SINGLE PAGES. IE ONE POSTSCRIPT AT A TIME

*DCS FILES (4 HIGH RESOLUTION COLOURS PLUS ONE LOW RES PIC)
NEED TO BE PUT TOGETHER IN PHOTOSHOP BEFORE POSTSCRIPTING
OR CREATE SEPARATED POSTSCRIPT.

*DOCUMENT SIZES MUST MATCH TRIM SIZE & POSTSCRIPTS MUST
BE SENT AT 100%

*IF NEW SOFTWARE IS RELEASED PLEASE CONSULT WITH HPV FOR
COMPATIBILITY

*PLEASE CONVERT ALL IMAGES FROM RGB TO CMYK BEFORE
POSTSCRIPTING AS QUARK'S CONVERSION MAY NOT BE THE DESIRED RESULT

*TIFF FILES PLACED SHOULD BE IN A BOX SET TO A WHITE BACKGROUND
UNLESS CLIPPING PATHS ARE PRESENT TO STOP JAGGED EDGES

*ALL SPOT COLOURS SHOULD BE SET TO CMYK IN QUARK AND/OR
ILLUSTRATOR FOR CORRECT BREAKDOWN UNLESS IT IS INTENDED TO
BE PRINTED AS SPOT COLOUR

*KEEP PAPER WIDTHS CONSISTENT THROUGHOUT THE POSTSCRIPTS - IT
SHOULD BE 30MM WIDER THAN YOUR TRIM SIZE

*IF ANY SPOT COLOUR FILES ARE SENT PLEASE CLEARLY MARK THE
COLOUR IN THE NAME OF THE FILE - OUR WORKFLOW IS NORMALLY
CMYK AND WILL OVERRIDE SPOT COLOURS IF WE ARE UNAWARE OF THEM